

Chapter 3: Transport Layer

our goals:

- ❖ understand principles behind transport layer services:
 - multiplexing, demultiplexing
 - reliable data transfer
 - flow control
 - congestion control
- ❖ learn about Internet transport layer protocols:
 - UDP: connectionless transport
 - TCP: connection-oriented reliable transport
 - TCP congestion control

Transport Layer 3-1


Chapter 3 outline

- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer
- 3.5 connection-oriented transport: TCP
 - segment structure
 - reliable data transfer
 - flow control
 - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

Transport Layer 3-2

Transport services and protocols

- ❖ provide *logical communication* between app processes running on different hosts
- ❖ transport protocols run in end systems
 - send side: breaks app messages into *segments*, passes to network layer
 - rcv side: reassembles segments into messages, passes to app layer
- ❖ more than one transport protocol available to apps
 - Internet: TCP and UDP

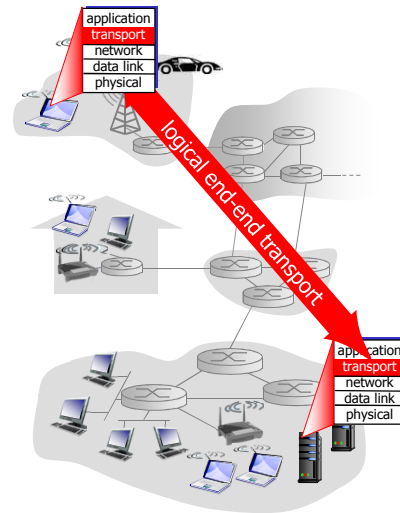

Transport Layer 3-3

Transport vs. network layer

- ❖ *network layer*: logical communication between hosts
- ❖ *transport layer*: logical communication between processes
 - relies on, enhances, network layer services

household analogy:


12 kids in Ann's house sending letters to 12 kids in Bill's house:

- ❖ hosts = houses
- ❖ processes = kids
- ❖ app messages = letters in envelopes
- ❖ transport protocol = Ann and Bill who demux to in-house siblings
- ❖ network-layer protocol = postal service

Transport Layer 3-4

Internet transport-layer protocols

- ❖ reliable, in-order delivery (TCP)
 - congestion control
 - flow control
 - connection setup
- ❖ unreliable, unordered delivery: UDP
 - no-frills extension of “best-effort” IP
- ❖ services not available:
 - delay guarantees
 - bandwidth guarantees

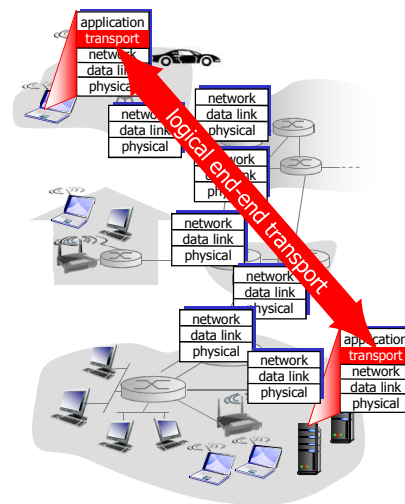

Transport Layer 3-5

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control


3.7 TCP congestion control

Transport Layer 3-6

Multiplexing/demultiplexing

multiplexing at sender:
handle data from multiple sockets, add transport header (later used for demultiplexing)


demultiplexing at receiver:
use header info to deliver received segments to correct socket

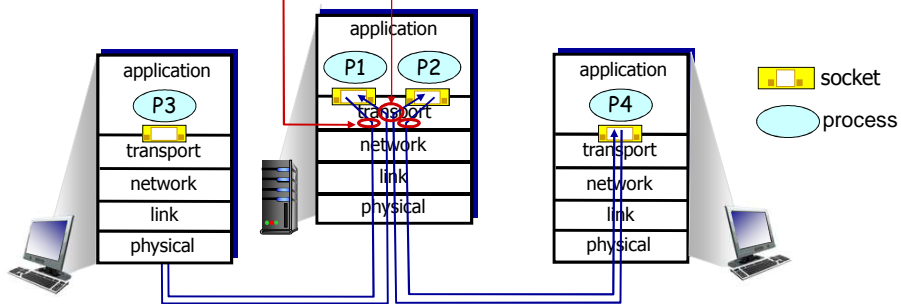

Transport Layer 3-7

How demultiplexing works

- ❖ host receives IP datagrams
 - each datagram has source IP address, destination IP address
 - each datagram carries one transport-layer segment
 - each segment has source, destination port number
- ❖ host uses **IP addresses & port numbers** to direct segment to appropriate socket

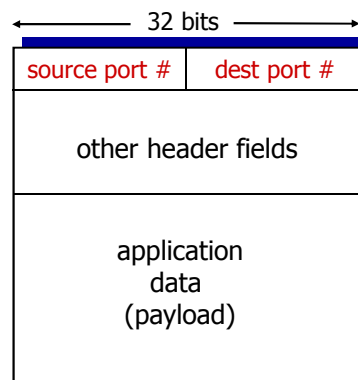

TCP/UDP segment format

Transport Layer 3-8

Connectionless demultiplexing

- ❖ recall: created socket has host-local port #:

```
DatagramSocket mySocket1
= new DatagramSocket(12534);
```

- ❖ recall: when creating datagram to send into UDP socket, must specify

- destination IP address
- destination port #

- ❖ when host receives UDP segment:

- checks destination port #
- directs UDP segment to socket with that port #




IP datagrams with *same dest. port #*, but different source IP addresses and/or source port numbers will be directed to *same socket* at dest

Transport Layer 3-9

Connectionless demux: example

```
DatagramSocket mySocket2 = new DatagramSocket (9157);
DatagramSocket serverSocket = new DatagramSocket (6428);
DatagramSocket mySocket1 = new DatagramSocket (5775);
```

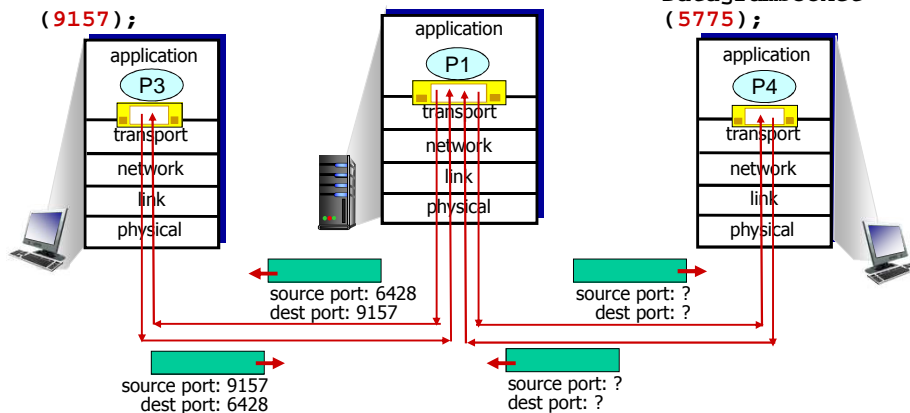


Transport Layer 3-10

Connection-oriented demux

- ❖ TCP socket identified by 4-tuple:
 - source IP address
 - source port number
 - dest IP address
 - dest port number
- ❖ demux: receiver uses all four values to direct segment to appropriate socket
- ❖ server host may support many simultaneous TCP sockets:
 - each socket identified by its own 4-tuple
- ❖ web servers have different sockets for each connecting client
 - non-persistent HTTP will have different socket for each request


Transport Layer 3-11

Connection-oriented demux: example

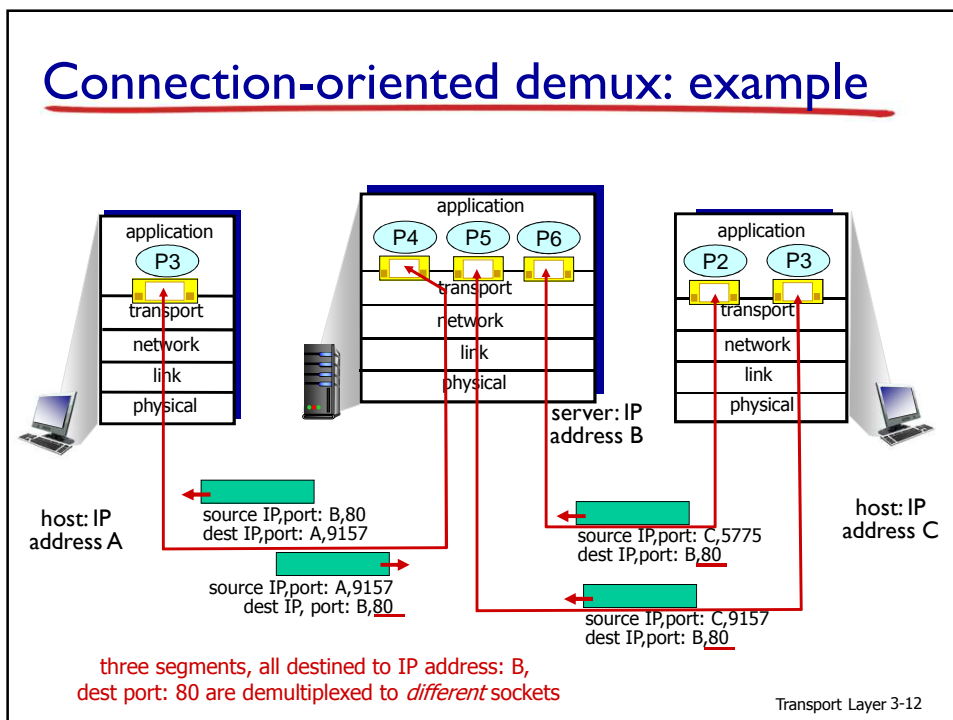

Transport Layer 3-12

Connection-oriented demux: example

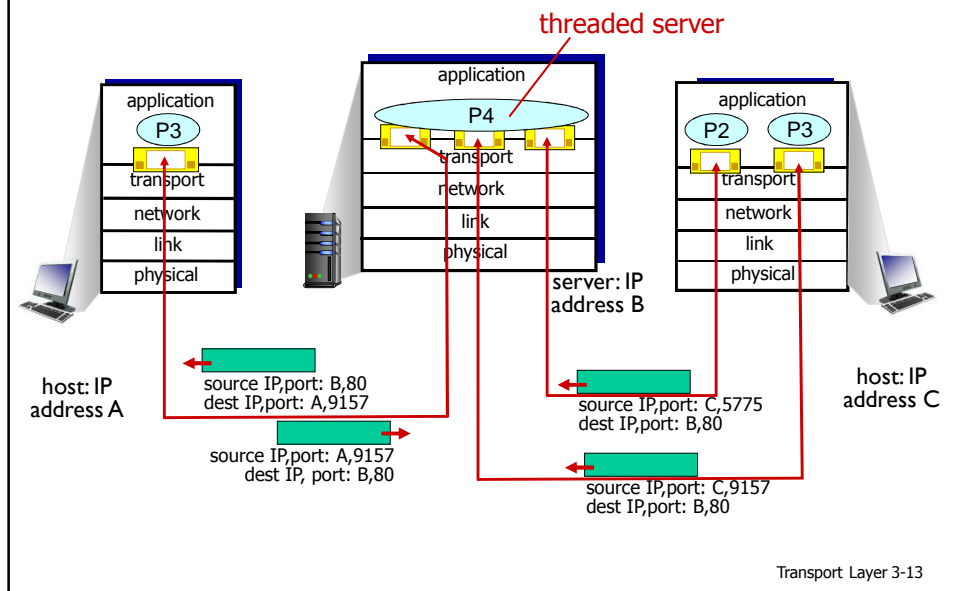

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control


Transport Layer 3-14

UDP: User Datagram Protocol [RFC 768]

- ❖ “no frills,” “bare bones” Internet transport protocol
- ❖ “best effort” service, UDP segments may be:
 - lost
 - delivered out-of-order to app
- ❖ **connectionless:**
 - no handshaking between UDP sender, receiver
 - each UDP segment handled independently of others
- ❖ UDP use:
 - streaming multimedia apps (loss tolerant, rate sensitive)
 - DNS
 - SNMP
- ❖ reliable transfer over UDP:
 - add reliability at application layer
 - application-specific error recovery!

Transport Layer 3-15

UDP: segment header

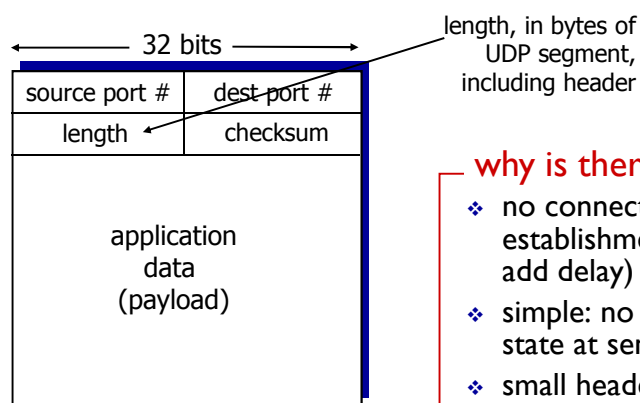

UDP segment format

why is there a UDP?

- ❖ no connection establishment (which can add delay)
- ❖ simple: no connection state at sender, receiver
- ❖ small header size
- ❖ no congestion control: UDP can blast away as fast as desired

Transport Layer 3-16

UDP checksum

Goal: detect “errors” (e.g., flipped bits) in transmitted segment

sender:

- ❖ treat segment contents, including header fields, as sequence of 16-bit integers
- ❖ checksum: addition (one’s complement sum) of segment contents
- ❖ sender puts checksum value into UDP checksum field

receiver:

- ❖ compute checksum of received segment
 - ❖ check if computed checksum equals checksum field value:
 - NO - error detected
 - YES - no error detected.
But maybe errors nonetheless? More later
-

Transport Layer 3-17

Internet checksum: example

example: add two 16-bit integers

		1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
		1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
wraparound	(1)	1	0	1	1	1	0	1	1	1	0	1	1	1	0	1	1
sum		1	0	1	1	1	0	1	1	1	0	1	1	1	1	0	0
checksum		0	1	0	0	0	1	0	0	0	1	0	0	0	0	1	1

Note: when adding numbers, a carryout from the most significant bit needs to be added to the result (will be added to the least significant bit)

Transport Layer 3-18


Chapter 3 outline

- 3.1 transport-layer services
- 3.2 multiplexing and demultiplexing
- 3.3 connectionless transport: UDP
- 3.4 principles of reliable data transfer
- 3.5 connection-oriented transport: TCP
 - segment structure
 - reliable data transfer
 - flow control
 - connection management
- 3.6 principles of congestion control
- 3.7 TCP congestion control

Transport Layer 3-19

Principles of reliable data transfer

- ❖ important in application, transport, link layers
 - top-10 list of important networking topics!




(a) provided service

- ❖ characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Transport Layer 3-20

Principles of reliable data transfer

- ❖ important in application, transport, link layers
 - top-10 list of important networking topics!

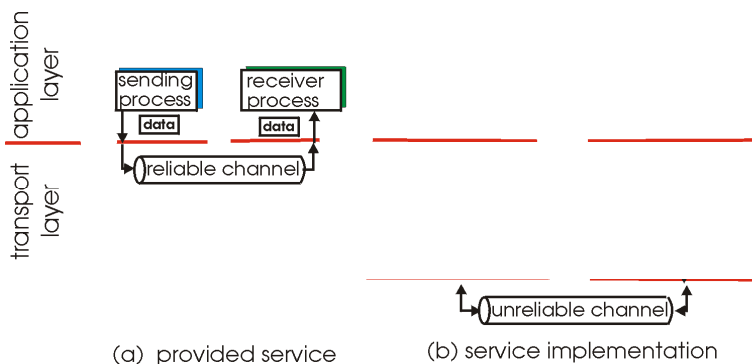


- ❖ characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Transport Layer 3-21

Principles of reliable data transfer


- ❖ It is important in both application, transport, link layers
 - top-10 list of important networking topics!

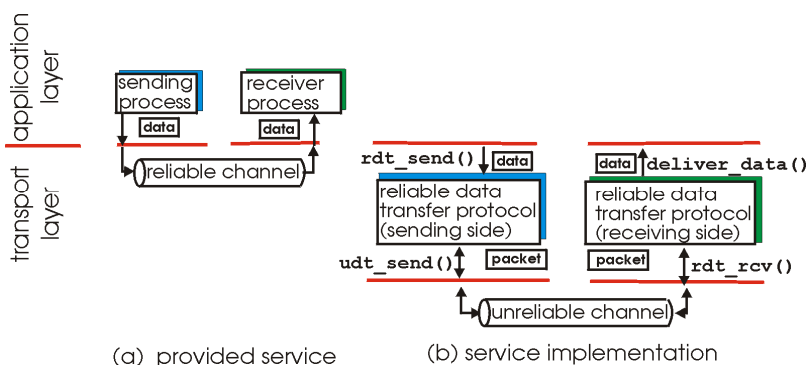

- ❖ characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Transport Layer 3-22


Reliable data transfer: getting started

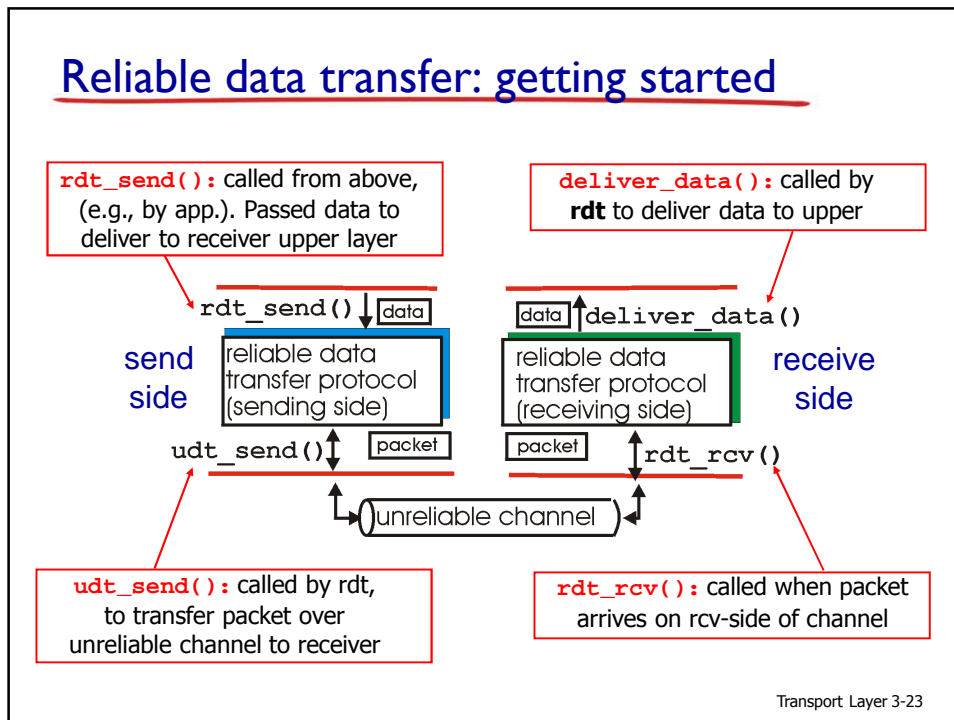

Reliable data transfer: getting started


we'll:

- ❖ incrementally develop sender, receiver sides of reliable data transfer protocol (rdt)
- ❖ consider only unidirectional data transfer
 - but control info will flow on both directions!
- ❖ use finite state machines (FSM) to specify sender, receiver

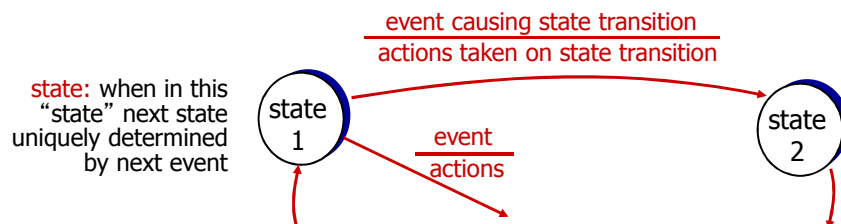

rdt1.0: reliable transfer over a reliable channel

- ❖ underlying channel perfectly reliable
 - no bit errors
 - no loss of packets
- ❖ separate FSMs for sender, receiver:
 - sender sends data into underlying channel
 - receiver reads data from underlying channel

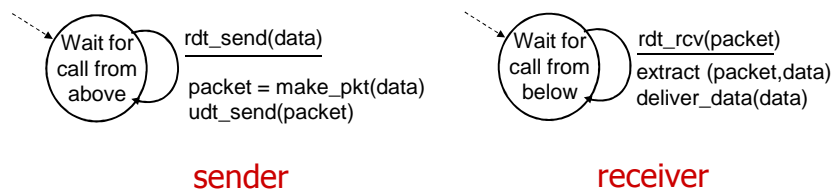

Transport Layer 3-25

rdt2.0: channel with bit errors

- ❖ underlying channel may flip bits in packet
 - checksum to detect bit errors
- ❖ *the question: how to recover from errors:*

How do humans recover from “errors” during conversation?


Transport Layer 3-26

rdt2.0: channel with bit errors

- ❖ underlying channel may flip bits in packet
 - checksum to detect bit errors
- ❖ the question: how to recover from errors:
 - *acknowledgements (ACKs)*: receiver explicitly tells sender that pkt received OK
 - *negative acknowledgements (NAKs)*: receiver explicitly tells sender that pkt had errors
 - sender retransmits pkt on receipt of NAK
- ❖ new mechanisms in rdt2.0 (beyond rdt1.0):
 - error detection
 - feedback: control msgs (ACK,NAK) from receiver to sender


Transport Layer 3-27

rdt2.0: FSM specification

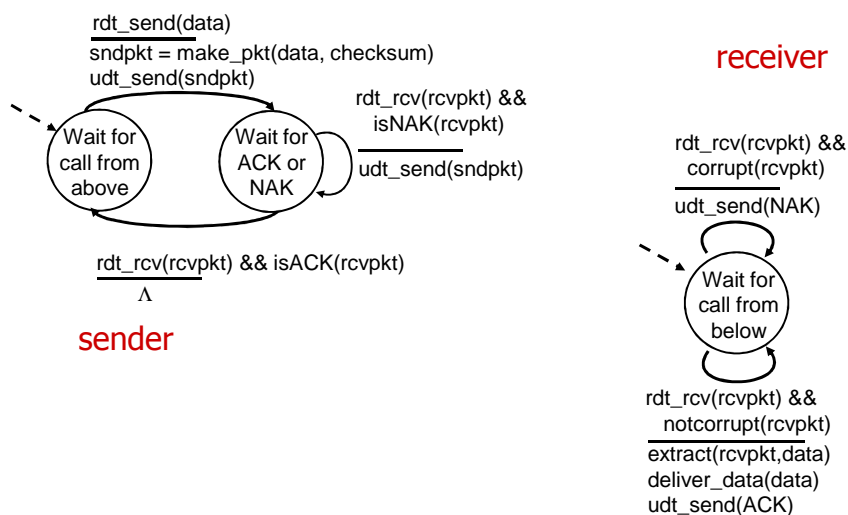


Transport Layer 3-28

rdt2.0: operation with no errors

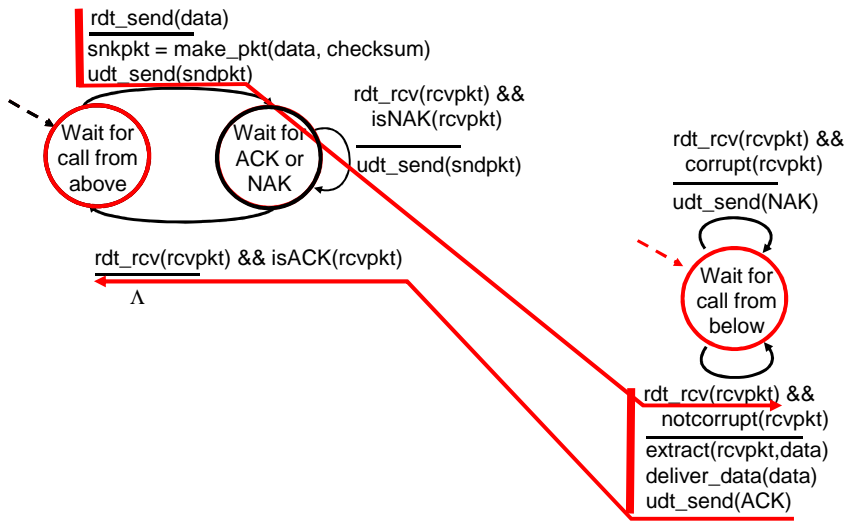

Transport Layer 3-29

rdt2.0: error scenario

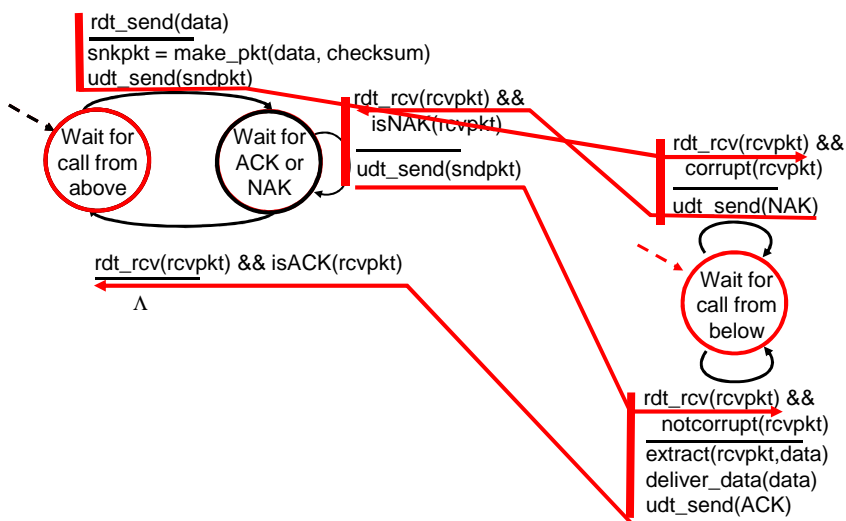

Transport Layer 3-30

rdt2.0 has a fatal flaw!

what happens if ACK/NAK corrupted?

- ❖ sender doesn't know what happened at receiver!
- ❖ can't just retransmit: possible duplicate


handling duplicates:

- ❖ sender retransmits current pkt if ACK/NAK corrupted
- ❖ sender adds *sequence number* to each pkt
- ❖ receiver discards (doesn't deliver up) duplicate pkt

stop and wait
 sender sends one packet,
 then waits for receiver
 response


Transport Layer 3-31

rdt2.1: sender, handles garbled ACK/NAKs

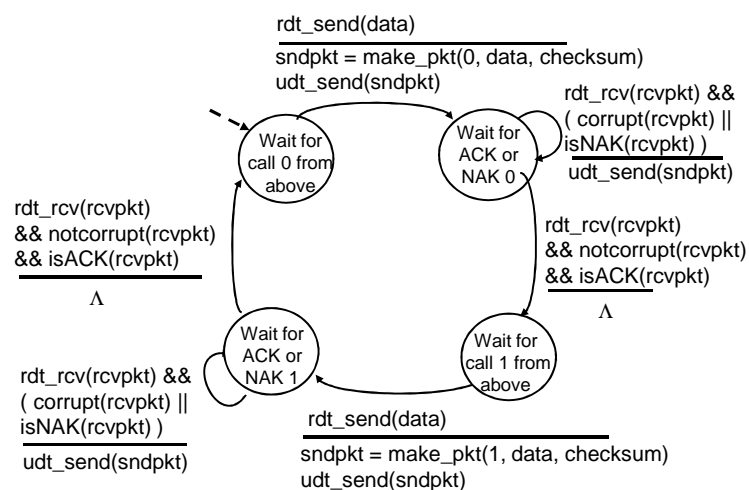

Transport Layer 3-32

rdt2.1: receiver, handles garbled ACK/NAKs

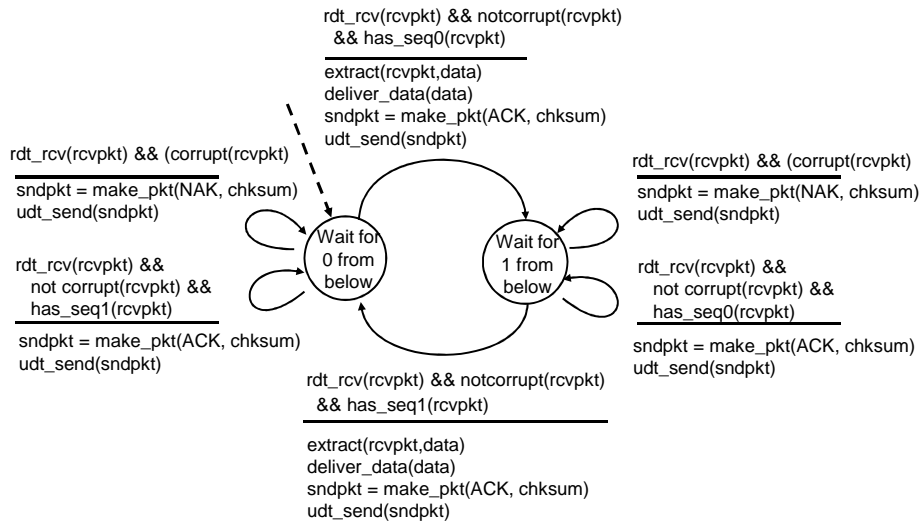

Transport Layer 3-33

rdt2.1: discussion

sender:

- ❖ seq # added to pkt
- ❖ two seq. #'s (0,1) will suffice. Why?
- ❖ must check if received ACK/NAK corrupted
- ❖ twice as many states
 - state must "remember" whether "expected" pkt should have seq # of 0 or 1

receiver:

- ❖ must check if received packet is duplicate
 - state indicates whether 0 or 1 is expected pkt seq #
- ❖ note: receiver can *not* know if its last ACK/NAK received OK at sender

Transport Layer 3-34

rdt3.0: channels with errors and loss

new assumption:

underlying channel can also lose packets (data, ACKs)

- checksum, seq. #, ACKs, retransmissions will be of help ... but not enough



approach: sender waits

“reasonable” amount of time for ACK

- ❖ retransmits if no ACK received in this time
- ❖ if pkt (or ACK) just delayed (not lost):
 - retransmission will be duplicate, but seq. #'s already handles this
 - receiver must specify seq # of pkt being ACKed
- ❖ requires countdown timer


Transport Layer 3-35

rdt3.0 in action

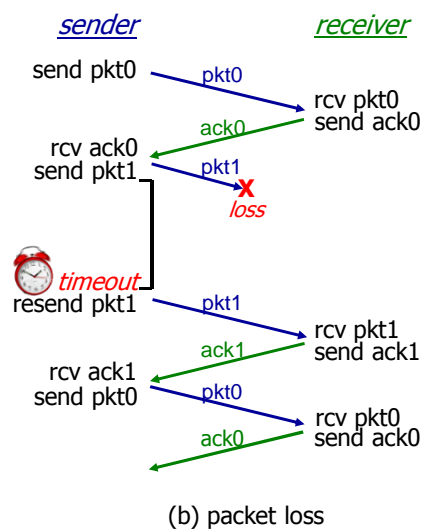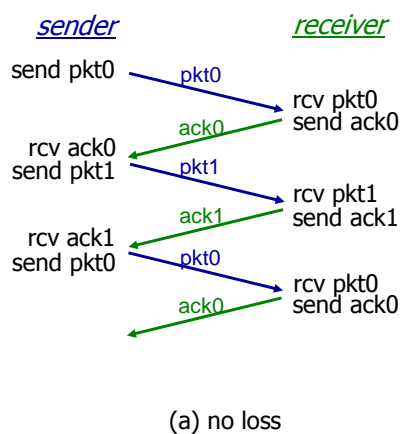

Transport Layer 3-36

rdt3.0 in action

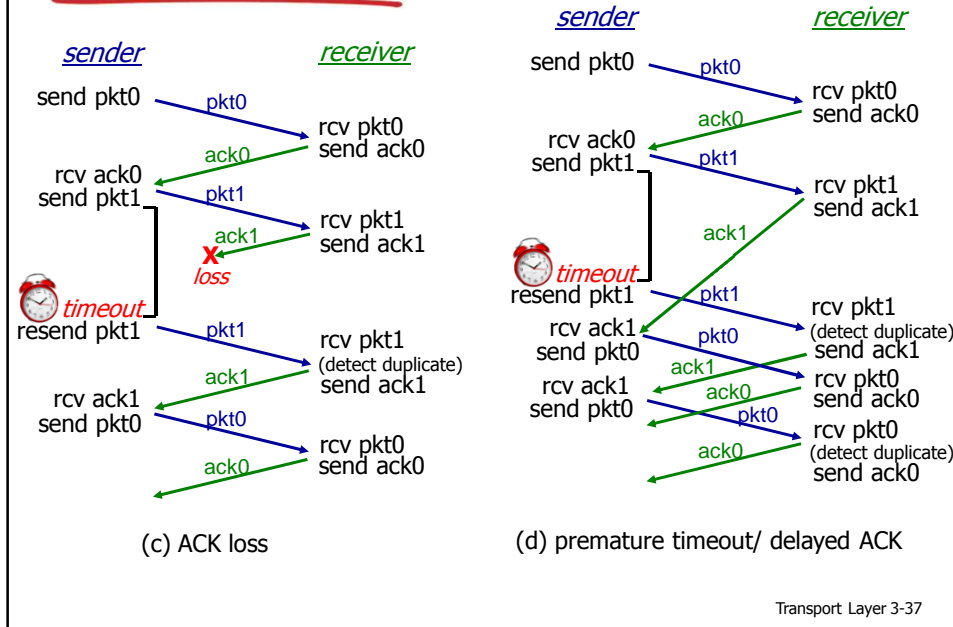

Performance of rdt3.0

- ❖ rdt3.0 is correct, but performance stinks
- ❖ e.g.: 1 Gbps link, 15 ms prop. delay, 8000 bit packet:


$$D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$$

- U_{sender} : **utilization** – fraction of time sender busy sending

$$U_{sender} = \frac{L/R}{RTT + L/R} = \frac{.008}{30.008} = 0.00027$$

- if RTT=30 msec, 1KB pkt every 30 msec: 33kB/sec thrupt over 1 Gbps link
- ❖ network protocol limits use of physical resources!

rdt3.0: stop-and-wait operation

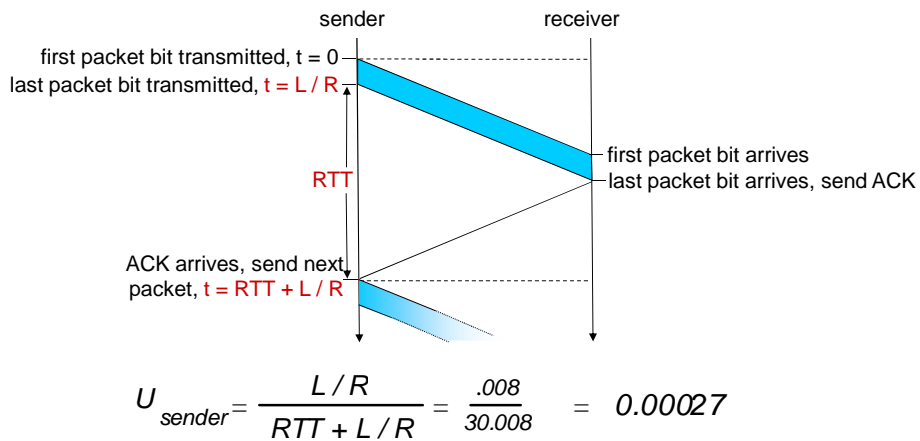


Transport Layer 3-39

Pipelined protocols

pipelining: sender allows multiple, “in-flight”, yet-to-be-acknowledged pkts

- range of sequence numbers must be increased
- buffering at sender and/or receiver

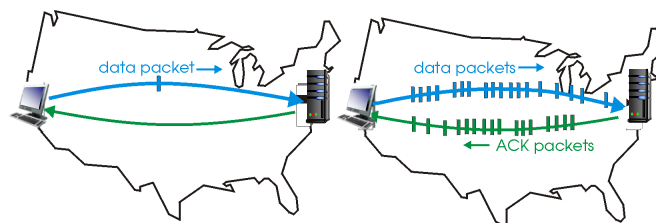


(a) a stop-and-wait protocol in operation

(b) a pipelined protocol in operation

- ❖ two generic forms of pipelined protocols: *go-Back-N*, *selective repeat*

Transport Layer 3-40

Pipelining: increased utilization

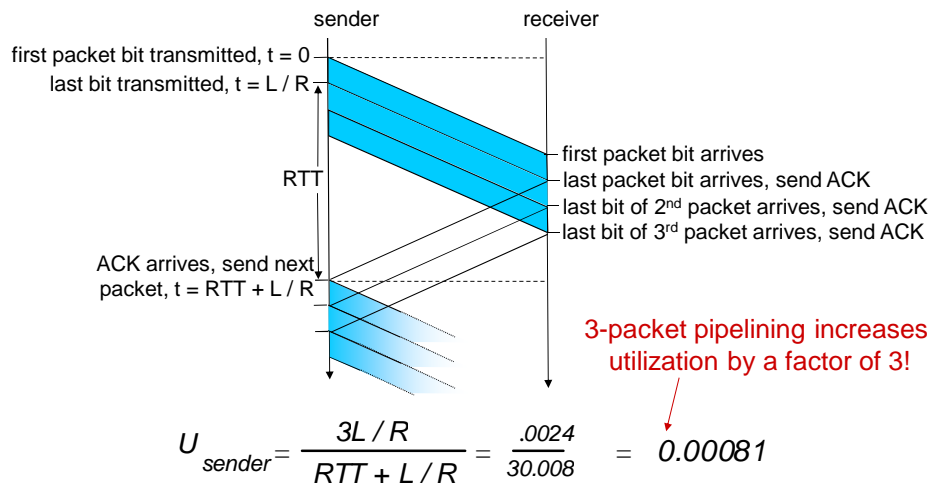

Transport Layer 3-41

Pipelined protocols: overview

Go-back-N:

- ❖ sender can have up to N unacked packets in pipeline
- ❖ receiver only sends *cumulative ack*
 - doesn't ack packet if there's a gap
- ❖ sender has timer for oldest unacked packet
 - when timer expires, retransmit *all* unacked packets


Selective Repeat:

- ❖ sender can have up to N unack'ed packets in pipeline
- ❖ rcvr sends *individual ack* for each packet
- ❖ sender maintains timer for each unacked packet
 - when timer expires, retransmit only that unacked packet

Transport Layer 3-42

Go-Back-N: sender


- ❖ k-bit seq # in pkt header
- ❖ “window” of up to N, consecutive unack’ed pkts allowed

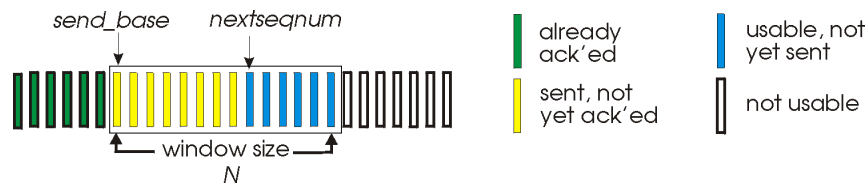

- ❖ ACK(n): ACKs all pkts up to, including seq # n - “cumulative ACK”
 - may receive duplicate ACKs (see receiver)
- ❖ timer for oldest in-flight pkt
- ❖ timeout(n): retransmit packet n and all higher seq # pkts in window

Transport Layer 3-43

GBN in action

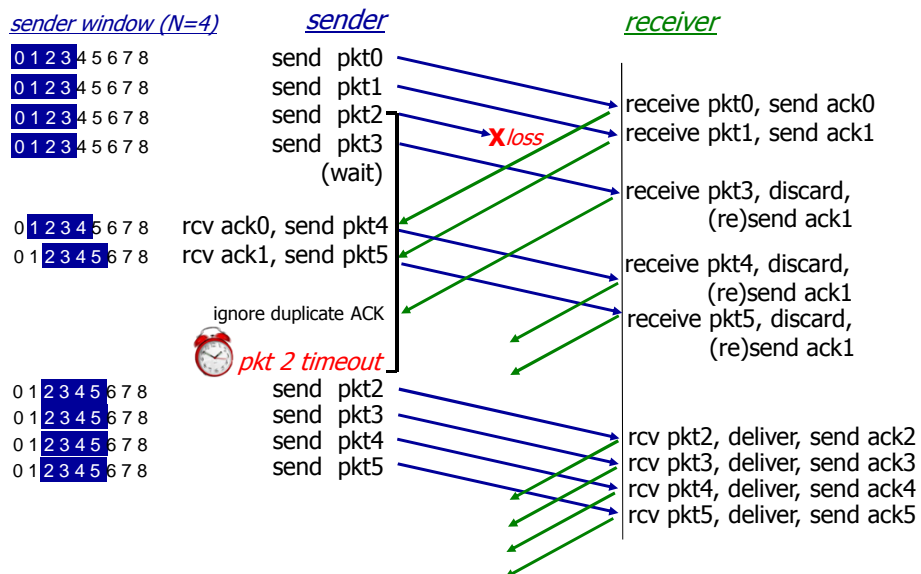


Transport Layer 3-44

Selective repeat

- ❖ receiver *individually* acknowledges all correctly received pkts
 - buffers pkts, as needed, for eventual in-order delivery to upper layer
- ❖ sender only resends pkts for which ACK not received
 - sender timer for each unACKed pkt
- ❖ sender window
 - N consecutive seq #'s
 - limits seq #'s of sent, unACKed pkts

Transport Layer 3-45

Selective repeat in action

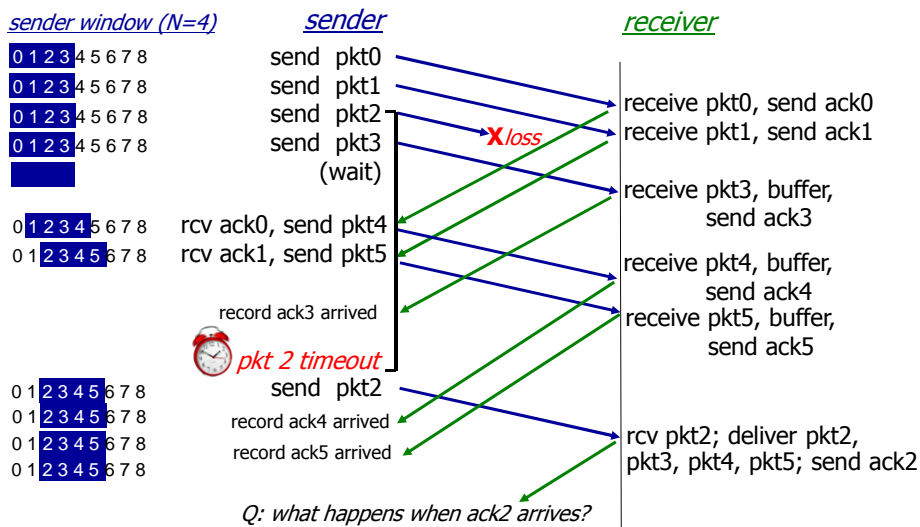

Transport Layer 3-46